


# WOODCRACKER C550

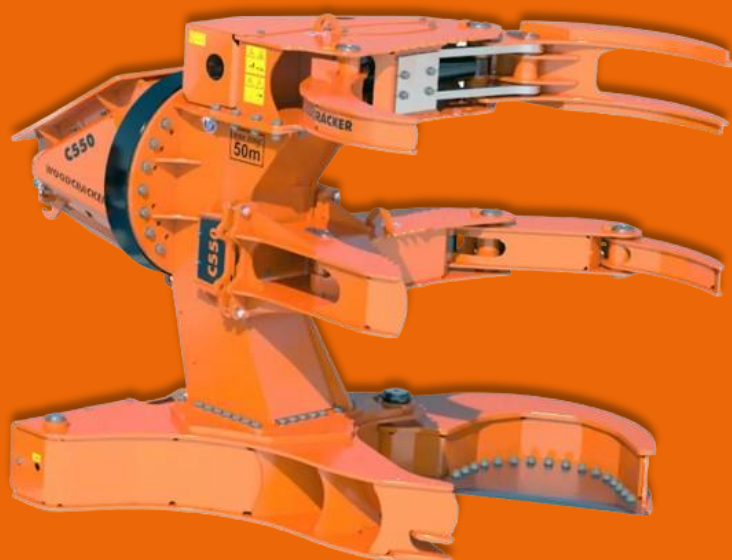

Woodcracker C trimmer heads make it easy to safely harvest trees and shrubs. Suitable for crop harvesting, rough terrain, mountainous areas, logging, problematic or dangerous slopes, and humid environments.

|   |                          |
|---|--------------------------|
| <b>Cutting diameter (softwood)</b>                                    | <b>600 mm</b>            |
| <b>Cutting diameter (Hardwood)</b>                                    | <b>550 mm</b>            |
| <b>Clamp opening</b>  | <b>1600 mm</b>           |
| <b>Opening the chisel</b>   | <b>900 mm</b>            |
| <b>Weight (basic - full equipment)</b>                                | <b>2000 kg - 2620 kg</b> |
| <b>Recommended hydraulic flow rate based on Woodcracker equipment</b> | <b>100-190 L/min.</b>    |
| <b>Recommended Working Pressure</b>                                   | <b>280 bar</b>           |

## KEY FEATURES

- Suitable for excavators, only 4 hydraulic connections needed
- Correct and simple connection
- Replaceable patented blade, high strength, easy to sharpen
- Additional conveyor workload due to shaft shears
- Support foot for safe storage and transport
- Robust and proven technology: low wear and low maintenance
- Cathodic tempering and powder coating
- Made of high-strength hardox steel

## OPTIONS

- Autospeed: allows faster closing of the cutting mechanism in softwood
- Accumulator: used to work quickly on softwood and to bundle material. Can be removed easily to reduce weight on the machine
- 4 mounting options:
  - Rigid mounting: use of the bulldozer rotary unit
  - Swivel cylinder: 2 48º rotations, low maintenance
  - Tipper: continuous 360º rotation
  - Motorized tipper with Power Tiltator that provides more resistance at the same speed.